


A modern and decorative bollard available in two heights with asymmetric light distribution offering very low upward light.

- Car Parks
- Building perimeter
- Pathways

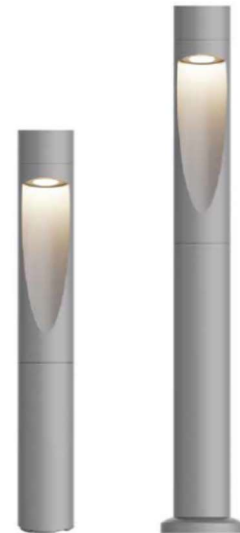


Features

- Extruded aluminium body
- Glass diffuser
- Epoxy powder coated RAL9007
- IP66
- IK09

Options

- DALI Dimming (**DA**)
- Custom RAL paint finish (**RAL**)
- J Bolt fixing Kit (**JB7000**)
- Root mounting Kit (**RM7000**)
- Flange mounting cover (**FMC**)

Dimensions

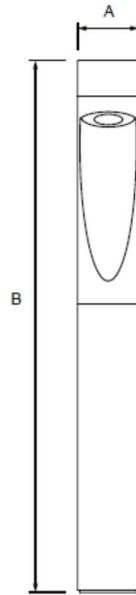

Dimensions: 'A' 118mm x 'B' 800/1000mm

Product Code

HRW-15-3K-SL-80	Harrow, 15w, 1050lm, 3K, IP65, 800mm, IK09, finished RAL9007
HRW-15-3K-SL-10	Harrow, 15w, 1050lm, 3K, IP65, 1000mm, IK09, finished RAL9007

** Suffix end of code with option required**

** Example – HRW-15-3K-SL-10-FMP Harrow, 15w, 1000mm c/w flange mounting cover