

Stylish low profile spun aluminium bulkhead c/w opal polycarbonate diffuser.

Applications

- Corridors
- Stairwells
- Break-Out
- Receptions
- Lobbies
- Classrooms




Features

- Aluminium spun housing
- Opal UV stabilised polycarbonate diffuser
- Epoxy power coated RAL9016 as standard
- 2 CCT Switchable
- Tridonic Driver
- IP20

Options

- Integrated 3hr emergency -Standard **(M3)** – Self Testing **(STE)**
- Microwave Sensor **(MW1)**
- Casambi Wireless Control **(BTC)**
- Custom body finishes available on request **(RAL)**

Dimensions

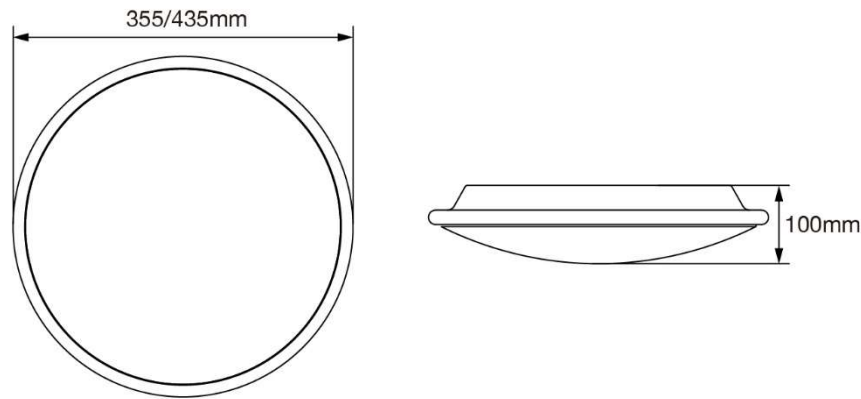

Product Code

LA-20-CCT-WH Lancing 20w, 1680lm, 355mm body finished white.

LA-27-CCT-WH Lancing 27w, 2750lm, 435mm body finished white.

** Suffix WH to RAL for Custom body finish

** Suffix end of code **(M3)** for emergency facility or **(MW1)** for Microwave sensor

Example: LA-20-CCT-WH-M3-MW1

Lancing c/w 3hr Emergency and Microwave sensor