

Ceiling/suspended mounted decorative bulkhead available in 2 body sizes 400 & 600mm have the option of rigid rod or wire suspension, CCT & wattage selectable.

Applications

- Corridors
- Stairwells
- Breakout
- Library





Features

- Aluminium housing epoxy powder coated white
- Opal UV stabilised diffuser
- 850° Glow wire
- IK06
- IP40
- Branded LED board and Osram driver

Options

- Integrated 3hr emergency -Standard (**M3**) – Self Testing (**STE**)
- DALI (**DA**)
- Casambi Wireless Control (**BTC**)
- Wire Suspension (**SUS-1M**)
- Rigid Rod suspension (**RM-1M**)

Dimensions

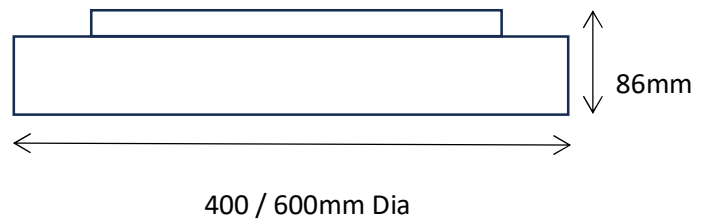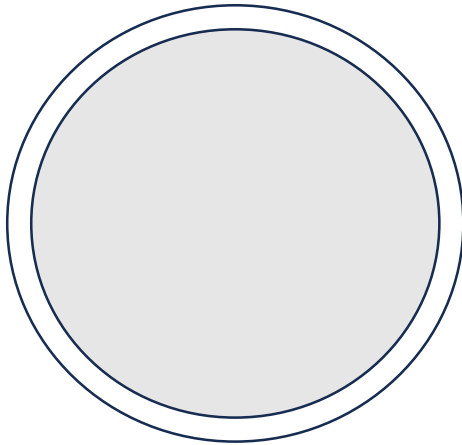

Product Code

OR-40-CCT-SW-WH	Oreo 400mm dia CCT switchable, wattage selectable 25-40w 3,750 – 4400lm
OR-60-CCT-SW-WH	Oreo 600mm dia CCT switchable, wattage selectable 52-60w 5,320 – 6870lm

** Suffix end of code **(M3)** for emergency facility or **(DA)** for DALI dimming

Example: OR-60-CCT-SW-WH-DA-M3

Oreo 600mm c/w DALI dimming & 3 hour maintained emergency