

A modern contemporary bollard with indirect light to reduce glare available with wattage and height options.

- Carparks
- Building perimeter
- Pathways
- Pedestrian Areas




Features

- Die-Cast aluminium body
- Polycarbonate diffuser
- Epoxy powder coated RAL9005
- IP66
- IK09


Options

- Integrated 3hr emergency -Standard **(M3)**
 - Micro-wave sensor **(MW1)**
 - Photo-cell **(PC)**
 - DALI Dimming **(DA)**
 - Custom RAL paint finish **(RAL)**
 - J-Bolt fixing Kit **(JB7000)**
 - Root Mounting Kit **(RM7000)**
- Self - Testing Emergency **(STE)**

Dimensions

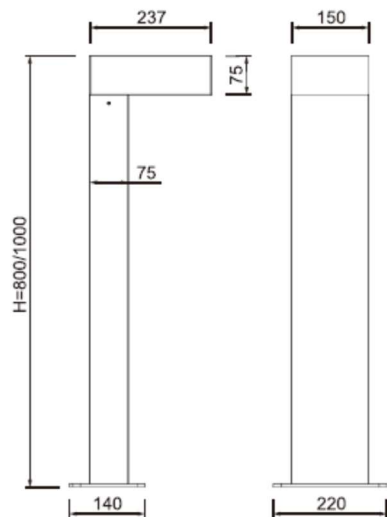

12w

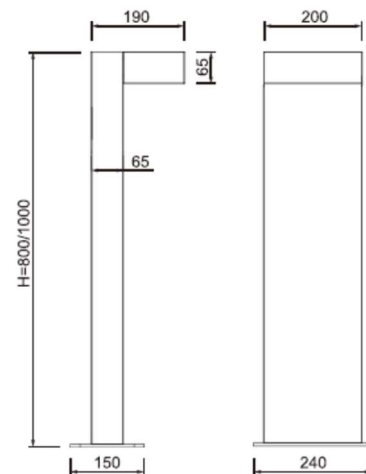

25w

Product Code

PLY-12-4K-BK-F-80	Plymouth bollard, 12w, 1,300lm, IP66, IK09, 800mm H, finished RAL9005
PLY-12-4K-BK-F-10	Plymouth bollard, 12w, 1,300lm, IP66, IK09, 1000mm H, finished RAL9005
PLY-25-4K-BK-F-80	Plymouth bollard, 25w, 2,700lm, IP66, IK09, 800mm H, finished RAL9005
PLY-25-4K-BK-F-10	Plymouth bollard, 25w, 2,700lm, IP66, IK09, 1000mm H, finished RAL9005

** Suffix end of code with option required**

** Example – PLY-12-4K-BK-F-M3

Plymouth Bollard, 12w, 1,300lm c/w 3hr emergency