

A decorative modern circular ceiling / Wall mounted LED with options of body sizes.

- Corridors
- Offices
- Communal Areas
- Education
- Public Places




Features

- Rolled steel body
- PMMA UV stabilized acrylic
- Epoxy powder coated RAL9003 (Other colour options available on request)
- IP40

Options

- Integrated 3hr emergency -Standard (**M3**) – Self-Testing Emergency (**STE**)
- DALI Monitored Emergency (**DA3**)
- DALI (**DA**)
- Microwave Sensor (**MW1**)
- Casambi Wireless Control (**BTC**)
- Micro-Prism UGR<19 diffuser (**MPO**)
- Suspension kit (**SUS/2M**)

Dimensions

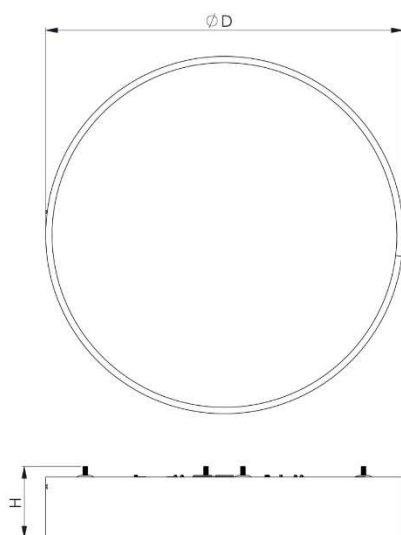

D – 300 / 450 / 600 / 900mm x H - 77mm

Product Code

RIS-20-4K-WH	Ribble, 20w, 4K, 2851lm. 300mm body finished RAL9003
RIS-25-4K-WH	Ribble, 25w, 4K, 4011lm, 450mm body finished RAL9003
RIS-36-4K-WH	Ribble, 36w, 4K, 5595lm, 450mm body finished RAL9003
RIS-38-4K-WH	Ribble, 38w, 4K, 6157lm, 600mm body finished RAL9003
RIS-52-4K-WH	Ribble, 52w, 4K, 8604lm, 600mm body, finished RAL9003
RIS-60-4K-WH	Ribble, 60w, 4K, 9821lm, 900mm body, finished RAL9003
RIS-68-4K-WH	Ribble, 68w, 4K, 11480lm, 900mm body, finished RAL9003

** Suffix end of code **(M3)** for emergency facility or **(DA)** for DALI/Switch DIM or **(BTC)** for Casambi Wireless Control or **(MW1)** Microwave sensor

**Example: RIS-60-4K-WH-MW1

Ribble 60w, 9821lm, 4K, white c/w microwave sensor