

Surface mounted Anti-Ligature luminaire IP65, IK10

- Hospitals
- Mental Health Units
- Detention Centre




Features

- 1.2mm Aluminium Base
- Die-Cast Aluminium bezel
- Epoxy powder coated RAL9016
- IP65
- IK10
- Lumaxx Satin Diffuser 850° Glow wire test

Options

- Integrated 3hr emergency -Standard **(M3)** – Self-Testing Emergency **(STE)**
- DALI Monitored Emergency **(DA3)**
- DALI **(DA)**
- Microwave Sensor **(MW1)**
- Casambi Wireless Control **(BTC)**

Dimensions

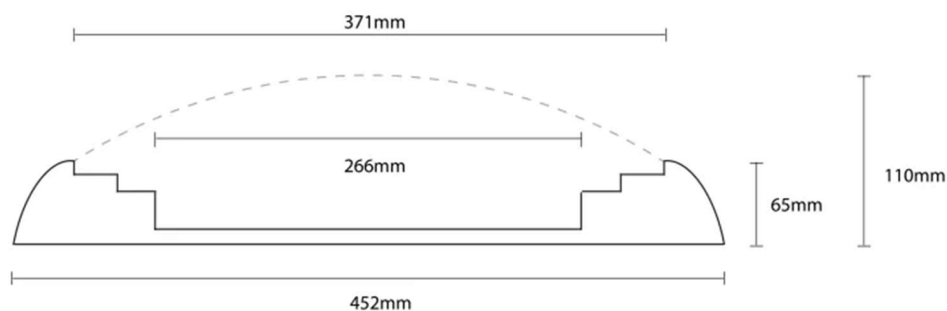

Product Code

SA-9-4K-WH	Salus, 9w, 4K, 1390lm, 452mm body finished RAL9016
SA-13-4K-WH	Salus, 13w, 4K, 1969lm, 452mm body finished RAL9016
SA-19-4K-WH	Salus, 19w, 4K, 2733lm, 452mm body finished RAL9016
SA-25-4K-WH	Salus, 25w, 4K, 3510lm, 452mm body finished RAL9016

** Suffix end of code **(M3)** for emergency facility or **(DA)** for DALI/Switch DIM or **(BTC)** for Casambi Wireless Control or **(MW1)** Microwave sensor

**Example: SA-13-4K-WH-MW1 Salus 13w, 1969lm, 4K, white c/w microwave sensor