

Architectural low glare tiltable LED downlight, IP54 with die-cast bezel in matt white, CCT selectable

- Corridors
- Offices
- Toilets
- Break-Out




Features

- Eaglerise LED and driver system for optimum performance
- Matt white bezel
- Various accessory options
- Fitted with an integral IP54 protective lens as standard
- Precision moulded 38° reflector
- Mains dimmable (Triac)
- CRI>90

Options

- DALI dimming – (DA)
- Remote 3hr emergency – (M3)
- Remote self-test 3hr emergency - (STE)
- Remote DALI monitored emergency – (D3)
- Casambi Wireless control – (BTC)
- White softlight baffle – (WSB)
- Black softlight baffle – (BSB)
- Honeycomb louvre – (HC)

Dimensions

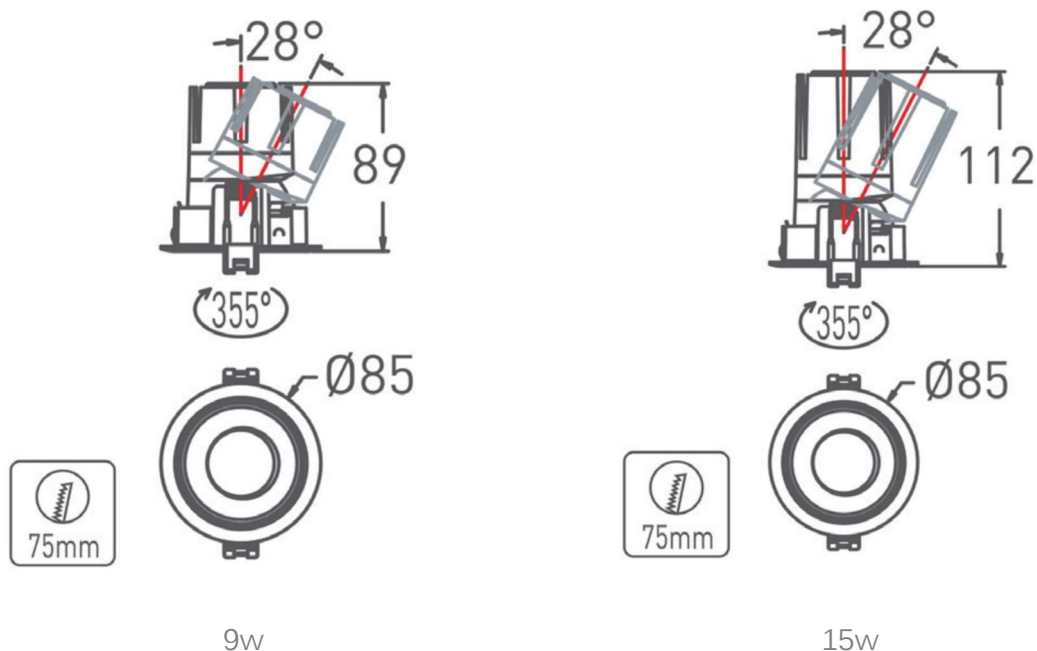

Product Code

SLW-85-9-CCT-WH

Selwyn, 9w, CCT selectable, satin chrome reflector, 1020lm

SLW-85-15-CCT-WH

Selwyn, 15w, CCT selectable, satin chrome reflector, 1430lm

** Example – SLW-85-9-CCT-WH-DA-WSB

Selwyn, 9w, 1,020lm, CCT, white bezel c/w DALI dimming & white softlight baffle



WSB



BSB



HC